


# ARENACOB4FC-FULL (40°) PROLIGHTS®

IP multifunctional FullColor LED blinder



## Goniophotometers Diagram

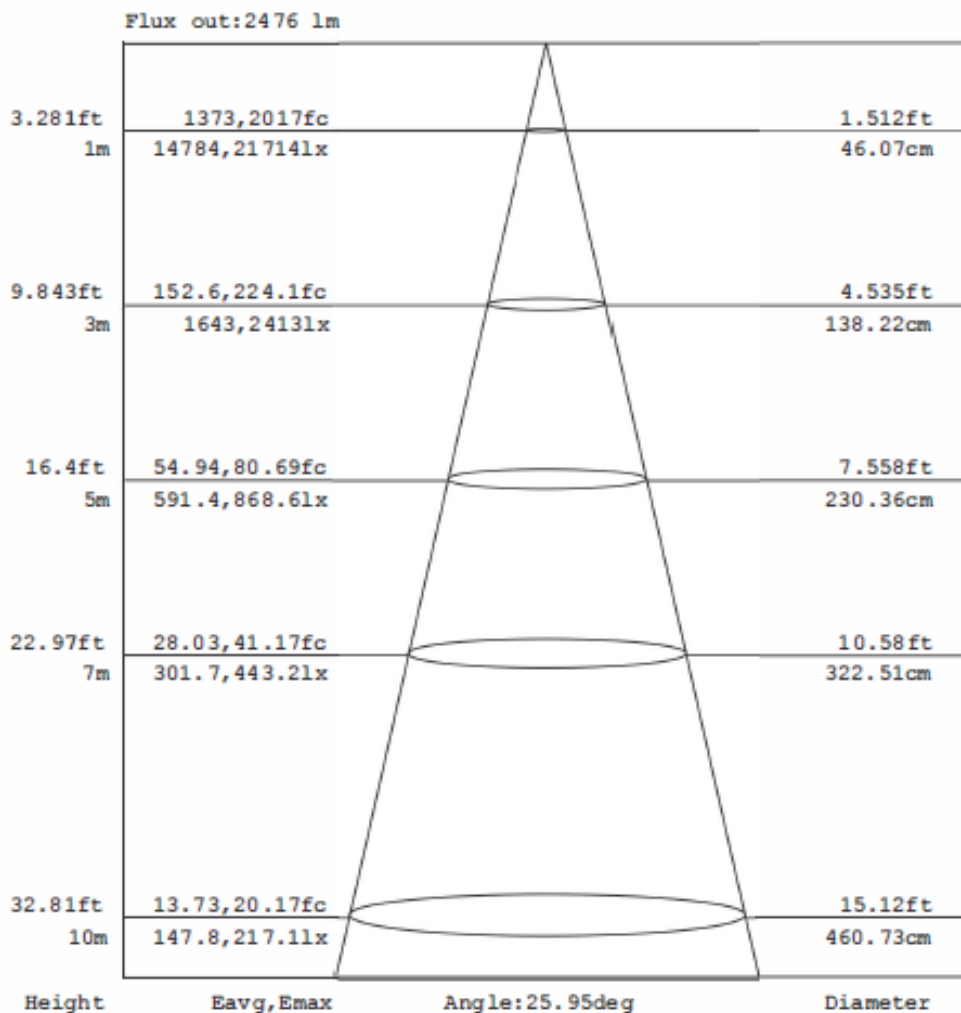

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Test Date: 2016-03-22

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.274  
 Humidity: 65.0%  
 Test Distance: 6.405m [K=1.0000]



WEBSITE: [www.prolightsamerica.com](http://www.prolightsamerica.com)

MAIL: [support@prolightsamerica.com](mailto:support@prolightsamerica.com)






# ARENACOB4FC-BLU WITHOUT LENS

IP multifunctional FullColor LED blinder



## Goniophotometers Diagram

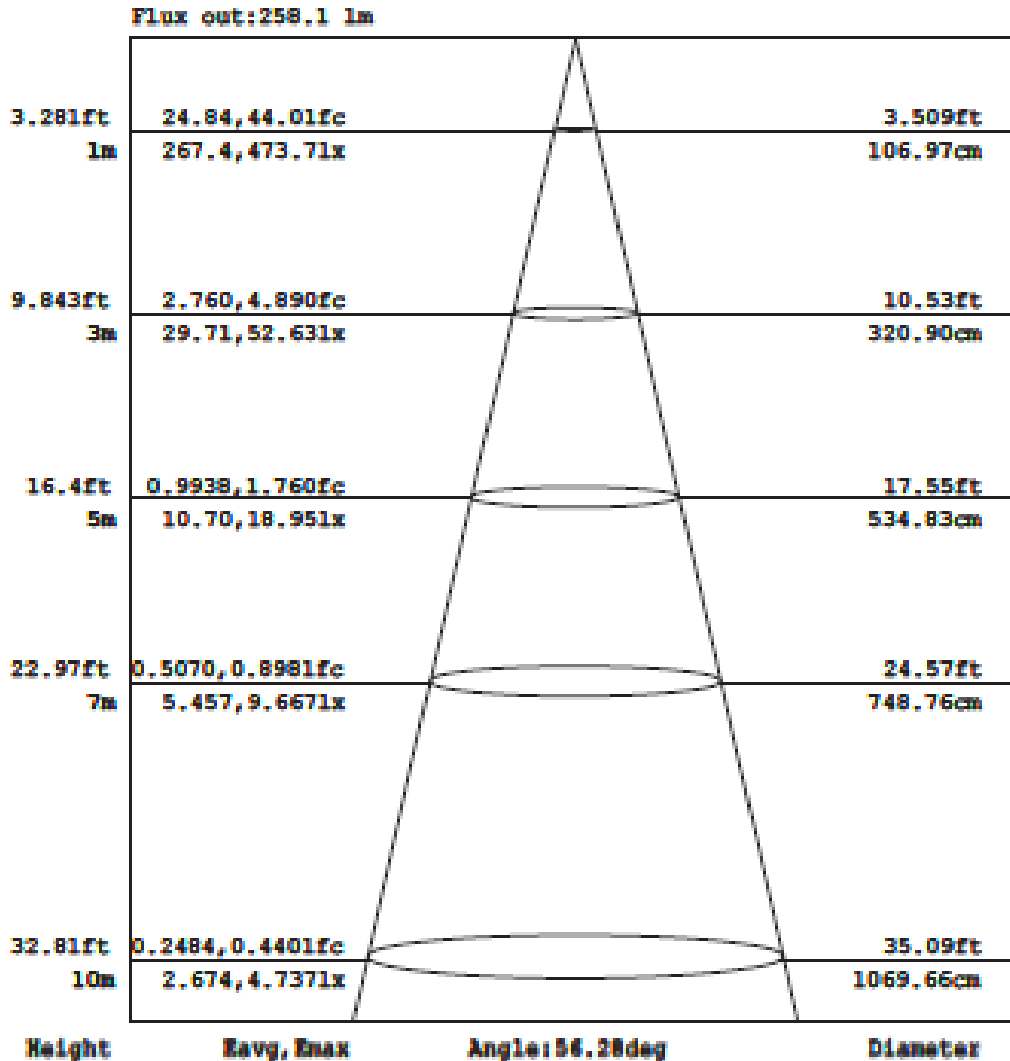

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(B) Range: -90 - 90DEG  
 H(B) Interval: 0.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2016-03-17

V(B) Range: -180 - 180DEG  
 V(B) Interval: 0.5DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.274  
 Humidity: 65.0%  
 Test Distance: 6.405m [K=1.0000]  
 Remarks:



WEBSITE: [www.prolightsamerica.com](http://www.prolightsamerica.com)


MAIL: [support@prolightsamerica.com](mailto:support@prolightsamerica.com)

# ARENACOB4FC-GREEN (24°)



IP multifunctional FullColor LED blinder

## Goniophotometers Diagram

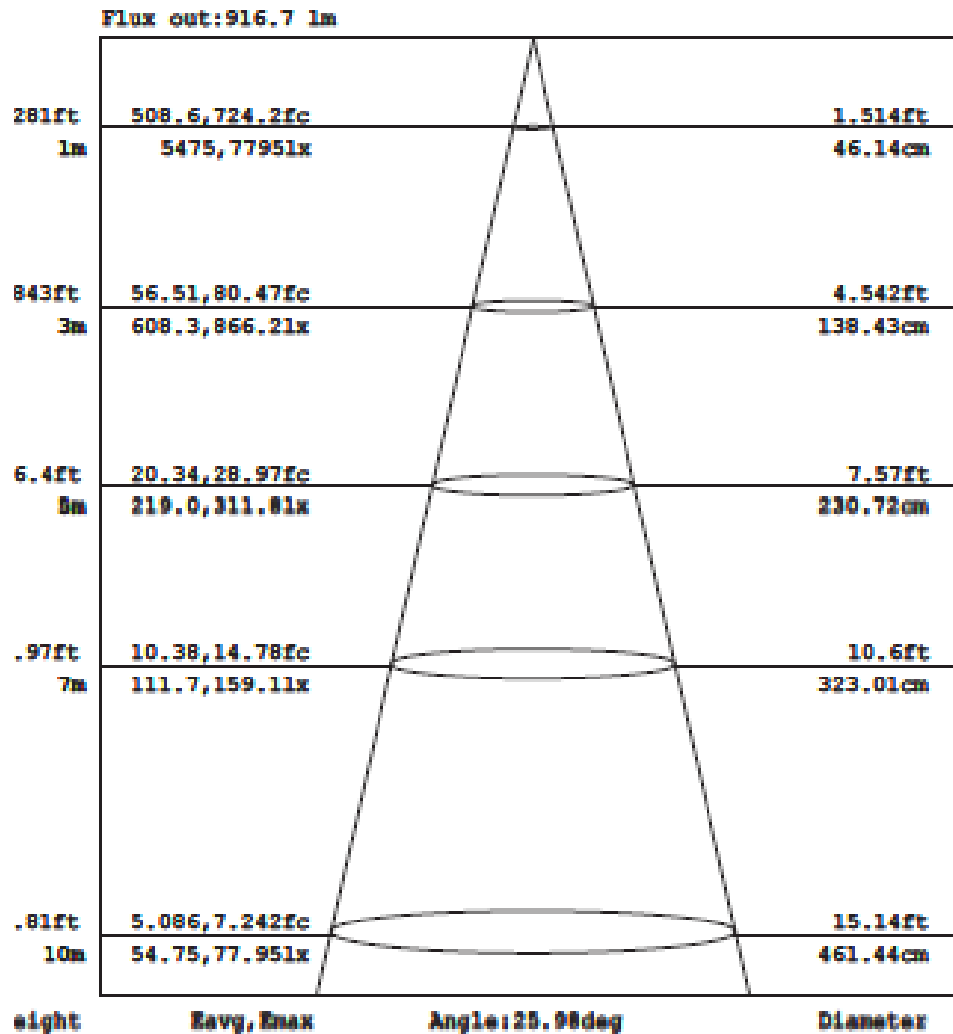

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operator:  
 Test Date: 2016-03-22

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.274  
 Humidity: 45.0%  
 Test Distance: 6.405m [K=1.0000]  
 Remarks:



WEBSITE: [www.prolightsamerica.com](http://www.prolightsamerica.com)


MAIL: [support@prolightsamerica.com](mailto:support@prolightsamerica.com)

# ARENACOB4FC-GREEN WITHOUT LENS

IP multifunctional FullColor LED blinder



## Goniophotometers Diagram

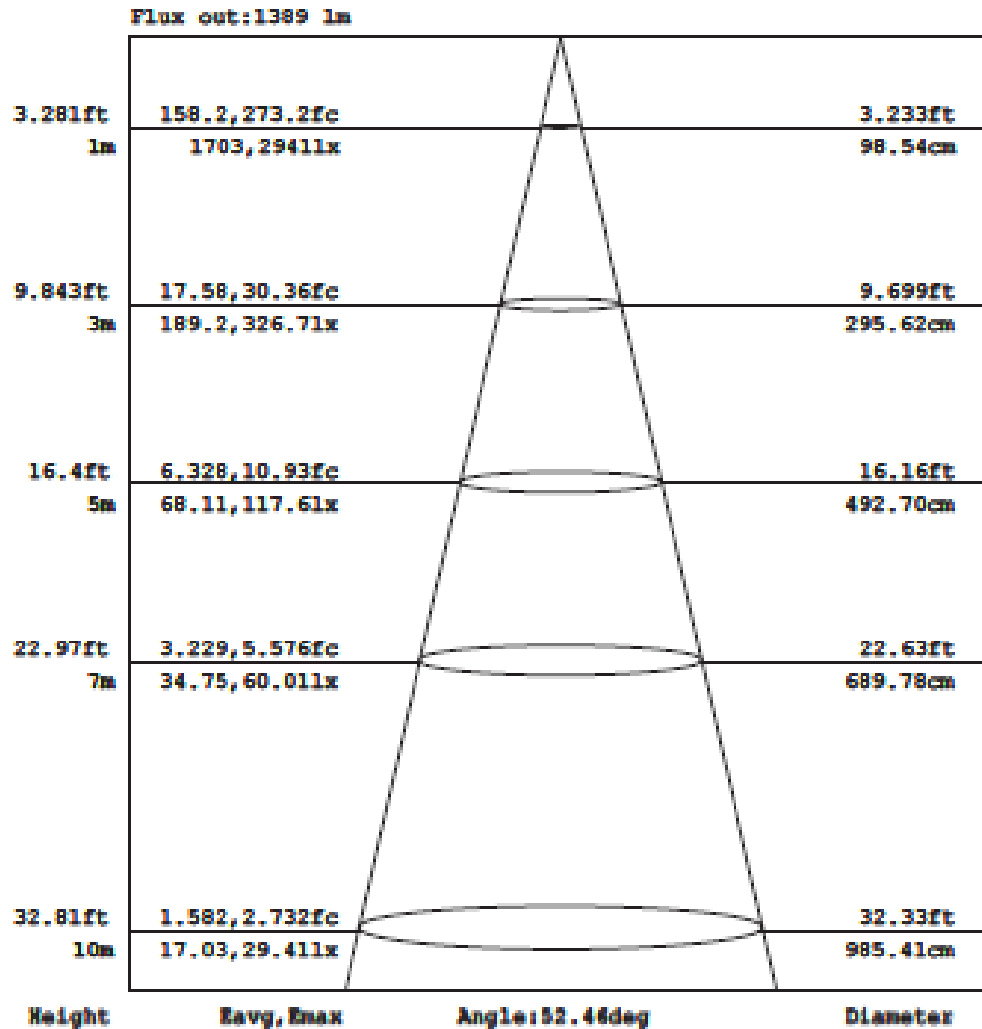

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(B) Range: -90 - 90DEG  
 H(B) Interval: 0.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2016-03-17

V(B) Range: -180 - 180DEG  
 V(B) Interval: 0.5DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.274  
 Humidity: 65.0%  
 Test Distance: 6.405m [K=1.0000]  
 Remarks:



WEBSITE: [www.prolightsamerica.com](http://www.prolightsamerica.com)

MAIL: [support@prolightsamerica.com](mailto:support@prolightsamerica.com)


# ARENACOB4FC-RED (24°)

IP multifunctional FullColor LED blinder



## Goniophotometers Diagram

I P

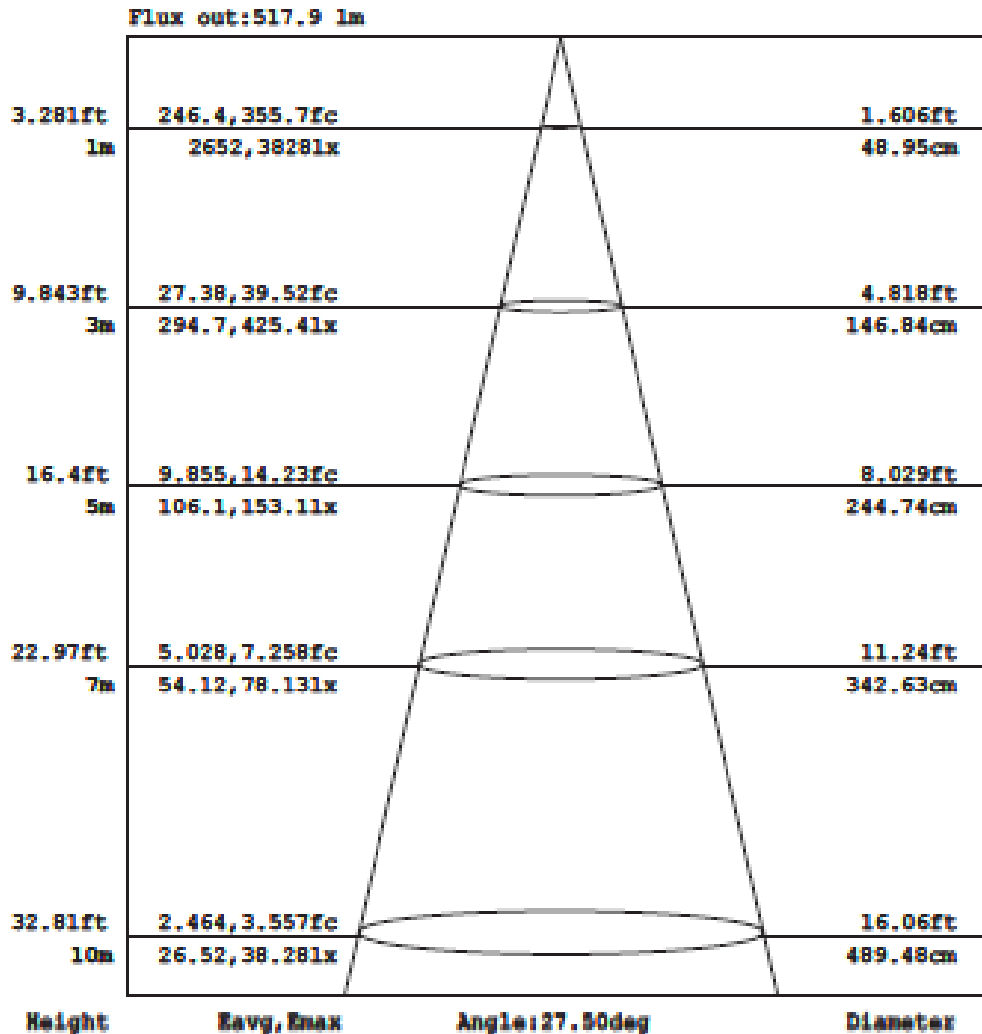

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2016-03-22

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.274  
 Humidity: 65.0%  
 Test Distance: 6.405m [K=1.0000]  
 Remarks:



WEBSITE: [www.prolightsamerica.com](http://www.prolightsamerica.com)


MAIL: [support@prolightsamerica.com](mailto:support@prolightsamerica.com)

# ARENACOB4FC-RED WITHOUT LENS

IP multifunctional FullColor LED blinder



## Goniophotometers Diagram

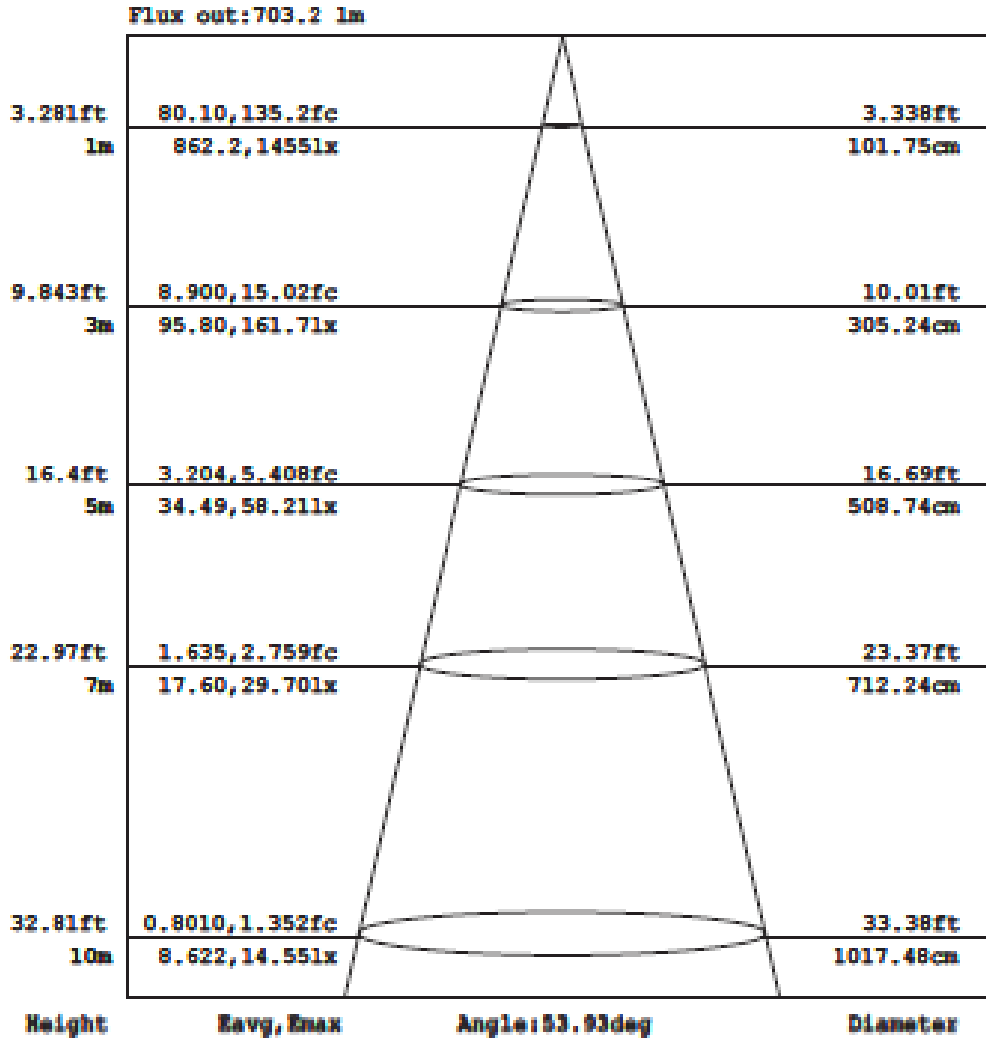

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(B) Range: -90 - 90DEG  
 H(B) Interval: 0.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2016-03-22

V(B) Range: -180 - 180DEG  
 V(B) Interval: 0.5DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.274  
 Humidity: 45.0%  
 Test Distance: 6.405m [K=1.0000]  
 Remarks:



WEBSITE: [www.prolightsamerica.com](http://www.prolightsamerica.com)

MAIL: [support@prolightsamerica.com](mailto:support@prolightsamerica.com)




# ARENACOB4FC-WHITE (24°) **PROLIGHTS**<sup>®</sup>

IP multifunctional FullColor LED blinder



## Goniophotometers Diagram

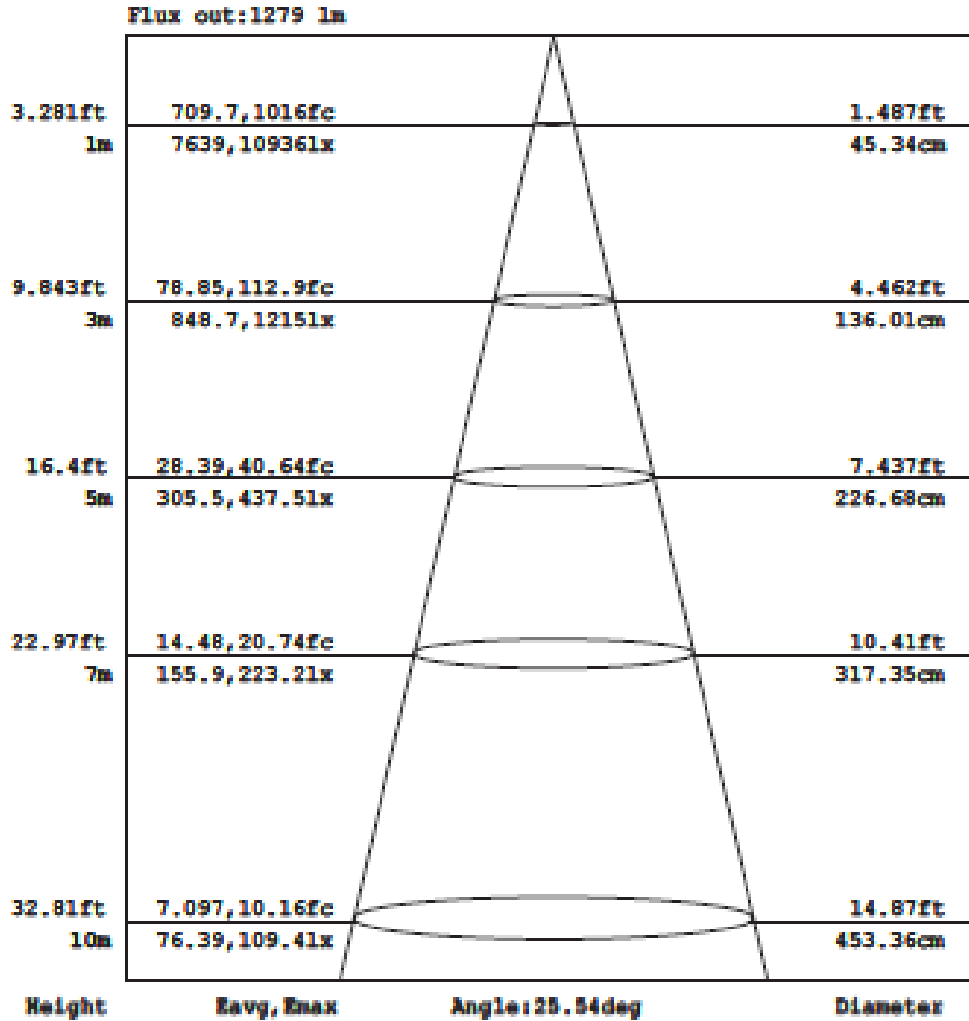

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(B) Range:-90 - 90DEG  
 H(B) Interval: 0.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2016-03-17

V(B) Range:-180 - 180DEG  
 V(B) Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.274  
 Humidity:45.0%  
 Test Distance:6.405m [K=1.0000]  
 Remarks:



WEBSITE: [www.prolightsamerica.com](http://www.prolightsamerica.com)


MAIL: [support@prolightsamerica.com](mailto:support@prolightsamerica.com)

# ARENACOB4FC-WHITE WITHOUT LENS

IP multifunctional FullColor LED blinder



## Goniophotometers Diagram

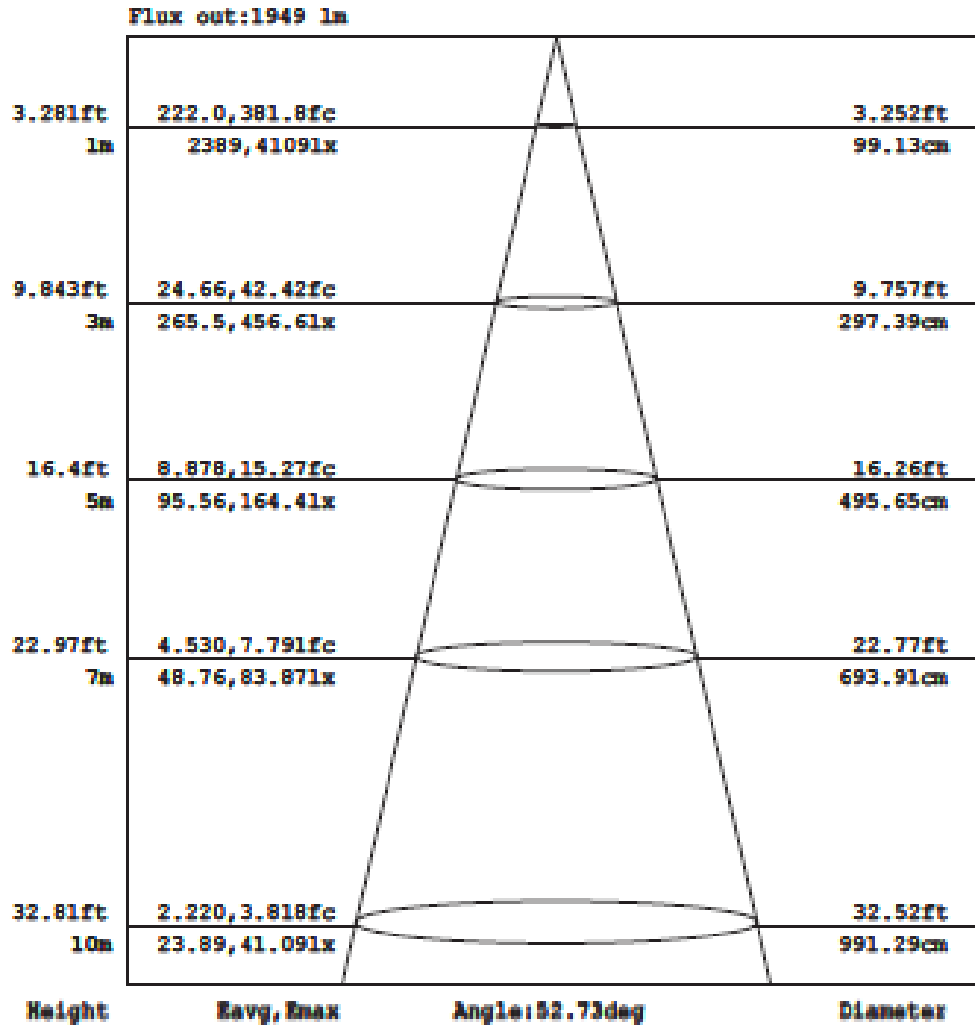

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(B) Range:-90 - 90DEG  
 H(B) Interval: 0.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2016-03-17

V(B) Range:-180 - 180DEG  
 V(B) Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.274  
 Humidity:65.0%  
 Test Distance:6.405m [R=1.0000]  
 Remarks:



WEBSITE: [www.prolightsamerica.com](http://www.prolightsamerica.com)

MAIL: [support@prolightsamerica.com](mailto:support@prolightsamerica.com)